


■ PRODUCT DATASHEET

Facial Recognition

11999091 KEYNIUS FACIAL RECOGNITION

Enhance secure and convenient access control using facial recognition. Keynius Facial Recognition provides the highest level of matching performance and accuracy by combining multiple cameras in a single device.

- Plug & Play
- Multi-face detection
- Integrated multispectral camera system
- Local identification database
- Presentation Attack Detection (PAD) conforming to ISO 30107-3 standard

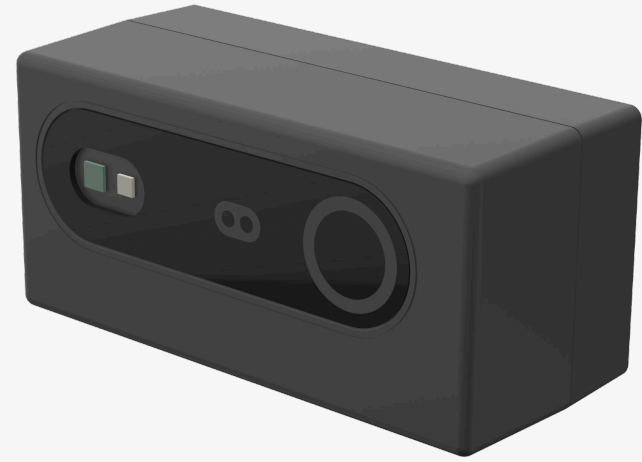

GENERAL

Dimensions (H x W x D) (mm)	42.0 x 88.3 x 45.7
Weight (Kg)	0.180
Material housing	ABS (Plastic)
Permitted ambient temperature (°C)	0 to +50
Humidity Range (RH)	5% - 95%

POWER

Input	DC 5V, 3A Requires additional Power supply
Power useage	See Keynius Power Consumption Datasheet

CERTIFICATIONS

Compliance	CE, UKCA, FCC, RoHS, WEEE, UL, CB, IEC 60825-1 Class 1, IEC 61000-4-2 Level 3
Protection type	IP50
Protection class	II

OPERATIONAL

Working distance	Face recognition: 20 - 150 cm With PAD enabled: 40 - 100 cm
Reading speed	Continuous Face Recognition: 10 fps With PAD Authentication: 4 fps
Field of View	Horizontal Mode - 76° V x 36° H
Supported Formats	PNG, JPG
Ambient lighting	0-20 Klx (NIR), 2-10 Klx (RGB)
Passive HD Video Surveillance	UVC
Camera Sensing Technology	Multi-Spectral RGB-IR Day/Night Sensing

■ PRODUCT DATASHEET

Technical Drawing

