

The Keynius logo is positioned in the top left corner. It features a stylized 'K' with a teal circle around the dot, followed by the word 'Keynius' in a white sans-serif font.

Keynius



Product Portfolio

CREDIT: ENRICH VISUALS

VERSION 1.0

DECEMBER 2025



Contents

SMART LOCKING SOLUTIONS

Smart Home	4	Payment Terminal Products	29	Battery Lock LEO	38
Smart Home Teacher V3	4	Payment Terminal Contactless & PIN	29	Battery Lock LEO PIN	40
Smart Home Student V3	5	Connectivity Products	30	Battery Lock LEO PIN – IP65	41
Smart Lock RENÉ	6	4G Router RUT241	30	Battery Lock LEO Horizontal PIN	42
Smart Lock RENÉ	6	Netgear Unmanaged Switch 5 ports	30	Battery Lock LEO Horizontal PIN – IP65	43
Door Shackle CLICK (Standard)	7	Simcard 10gb EU only	30	Battery Lock LEO PIN – Rental	44
Door Shackle BRIGHT(Y) (Non-metal)	8	Accessories	31	Battery Lock LEO PIN – IP65 – Rental	45
Door Shackle BRIGHT(Y) (Metal)	9	Lock Profile	31	Battery Lock LEO RFID	46
LED Door Guide BRIGHT(Y)	10	Mechanical Emergency Opening Wire + Clamp 2000mm	32	Battery Lock LEO RFID – IP65	47
Cover SUIT	11	UPS 1 hour	32	Battery Lock LEO Horizontal RFID	48
Cover TUX (Wall mount)	12	Cables	33	Battery Lock LEO Horizontal RFID – IP65	49
Cover TUX (Profile mount)	14	Smarty RFID Cable USB (90 degrees)	33	Battery Lock LEO RFID Cards	50
1.0 Hardware	15	Lock Cable RENÉ (Normal)	33	Battery Lock LEO Battery Pack SQUARE	51
SmartCom	15	Lock Cable RENÉ (RFID)	33	Battery Lock LEO Battery Pack TALL	52
SmartHub	16	Lock Cable Smart Lock RENÉ to SmartHub 1.0	34	Battery Lock LEO Mounting Hardware	53
Smart Lock 1.0 (Rear Cable)	17	Lock Cables 1.0	34	RFID Infographic stickers	54
Smart Lock 1.0 Cover	18	Ethernet Cable CAT6	34	PIN Infographic stickers	54
Smarty Products	19	Power Supplies	35	Battery Lock LEO Demo Package	54
Smarty 8 Inch	19	Smart Home Power Supply	35	Rescue 5V	55
Smarty 8 Inch – IP65	20	SmartHub Power Supply	36	Cylinder Locks	56
Smarty 15 Inch	21	Power Connectors C5	37	Cylinder Lock	56
Smarty 15 Inch – IP65	22			Latches	57
Smarty without Screen	24			Offset Latch 0mm	57
Reader Products	25			Offset Latch 3mm (standard)	57
Basic RFID Reader (Mifare)	25			Offset Latch 6mm	57
Advanced RFID Reader (HID)	26			Offset Latch 9mm	57
RFID Master Card	27				
RFID User Card	27				
QR-Code Reader – IP66	28				



Smart Home Teacher V3

11607003 SMART HOME TEACHER V3

- Plug & Play
- Connect up to 13 Students on 1 teacher
- Open all locks emergency opening
- Connect Smart Lock RENÉ + Add-ons



Smart Home Student V3

11608003 SMART HOME STUDENT V3

- Plug & Play
- Connects up to 16 Smart Locks
- Open student locks emergency opening
- Connect Smart Lock RENÉ + Add-ons

Technical Specifications

GENERAL

Material housing ABS/PC (Plastic)

POWER

Input DC 12V, 7A


Should be ordered with Smart Home power supply

CERTIFICATIONS

Compliance CE, C-Tick, FCC, PSE, RCM, RoHS, UKCA

Protection type IP20

Technical Drawing

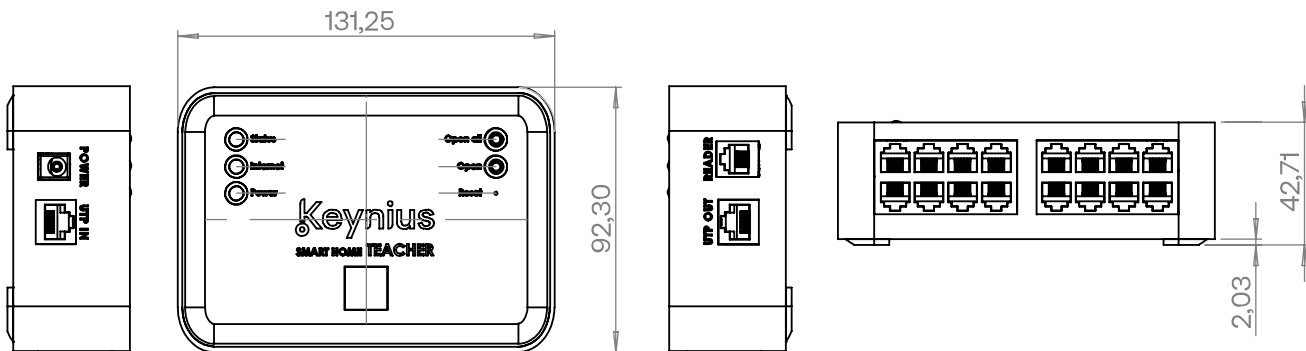

Technical Specifications

GENERAL

Material housing ABS/PC (Plastic)

POWER

Input DC 12V, 7A


Should be ordered with Smart Home power supply

CERTIFICATIONS

Compliance CE, C-Tick, FCC, PSE, RCM, RoHS, UKCA

Protection type IP20

Technical Drawing

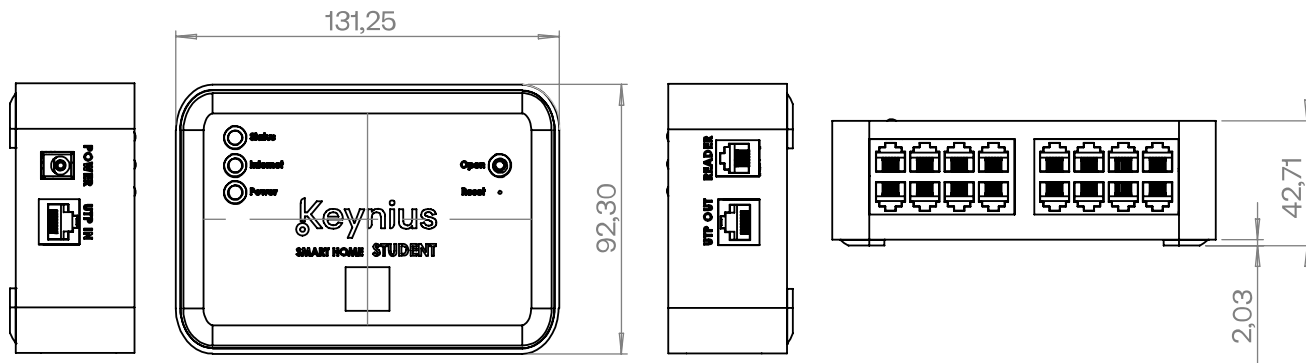



Smart Lock RENÉ

11603050 SMART LOCK RENÉ

- 2 ways of cable connection
- Mechanical emergency opening
- Cabinet mount or profile mount
- Push- & Pop2open by software



Door Shackle CLICK (Standard)

11602015 DOOR SHACKLE CLICK (STANDARD)

- For standard locking operations
- Self-aligning mechanism
- Available for metal, and non-metal cabinets
- Compatible with Smart Lock 1.0

Technical Specifications

GENERAL

Material housing ABS/PC (Plastic)

POWER


Input DC12V, 2.4A

CERTIFICATIONS

Compliance CE, FCC, UKCA, PSE, RoHS, C-Tick, RCM

Protection type IP55

Technical Drawing

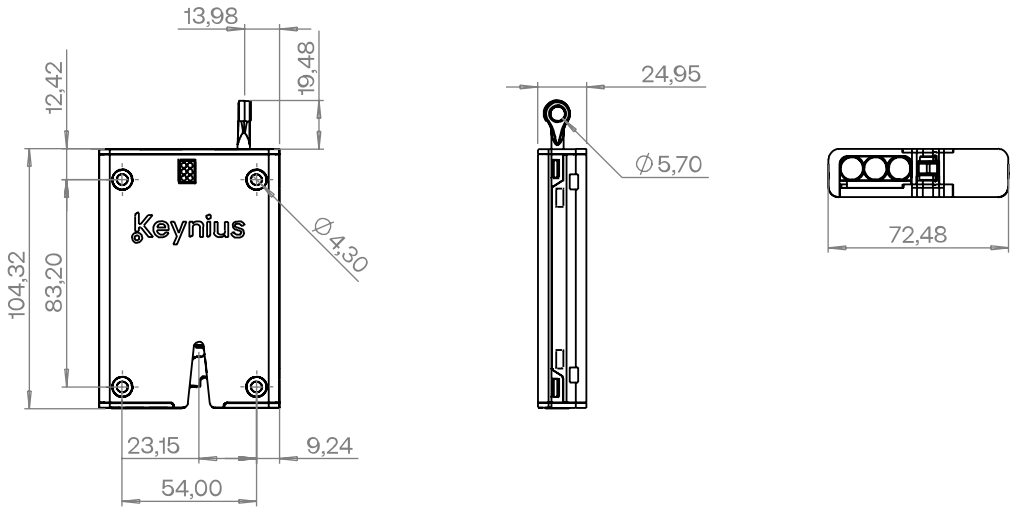

Technical Specifications


GENERAL

Material housing ABS/PC (Plastic)

CERTIFICATIONS

Protection type IP55

Technical Drawing

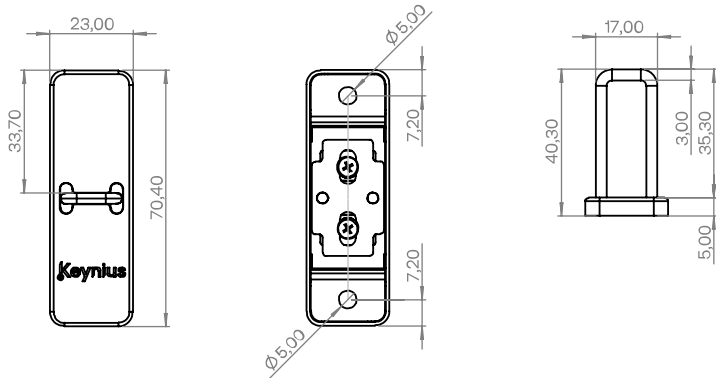



Door Shackle BRIGHT(Y) (Non-metal)

11602017 BRIGHT (LED) (NON-METAL)
11603070 BRIGHTY MIFARE (LED+RFID) (NON-METAL)
11603071 BRIGHTY HID (LED+RFID) (NON-METAL)

- Self-aligning mechanism
- LED Locker status
- Open locker by RFID on the door (optional)
- Available for HPL and wooden lockers



Door Shackle BRIGHT(Y) (Metal)

11602019 BRIGHT (LED) (METAL)
11603073 BRIGHTY MIFARE (LED+RFID) (METAL)

- Self-aligning mechanism
- LED Locker status
- Open locker by RFID on the door
- Customisable sticker

Technical Specifications

GENERAL

Material housing	ABS/PC (Plastic)
Comes with	LED Door Guide - BRIGHT(Y)

CERTIFICATIONS

Protection type	IP30
-----------------	------

Technical Specifications


GENERAL

Material housing	ABS/PC (Plastic)
Comes with	LED Door Guide - BRIGHT(Y)


CERTIFICATIONS

Protection type	IP30
-----------------	------

Technical Drawing

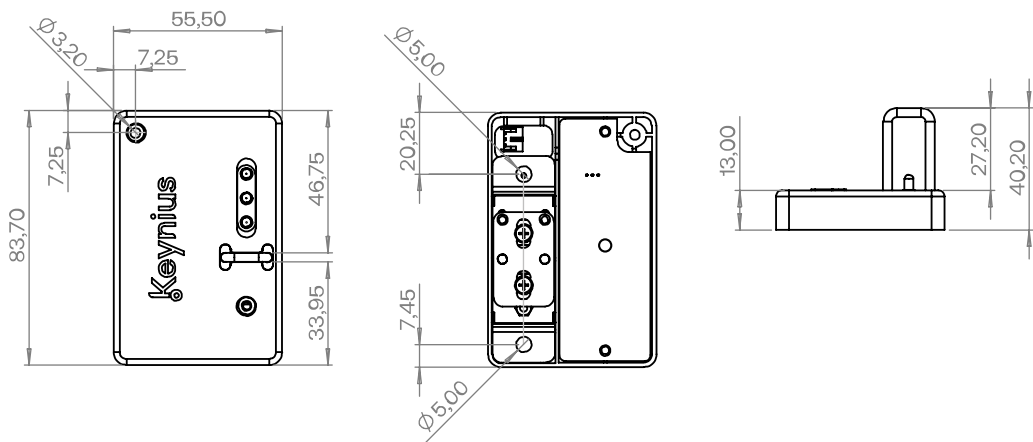

Technical Drawing

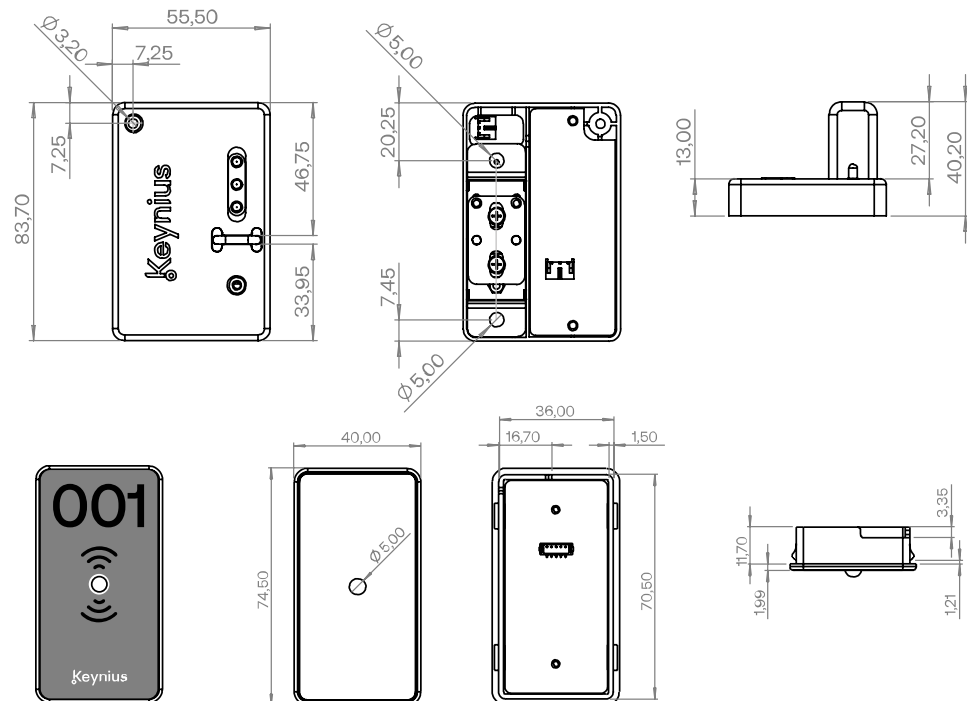



LED Door Guide BRIGHT(Y)

11602018 LED DOOR GUIDE BRIGHT(Y)



Cover SUIT

11604091 COVER SUIT

- Easy 'Plug & Secure'
- Branding possibilities

Technical Specifications


GENERAL

Material housing	ABS/PC (Plastic)
------------------	------------------

CERTIFICATIONS

Protection type	IP66
-----------------	------

Technical Drawing

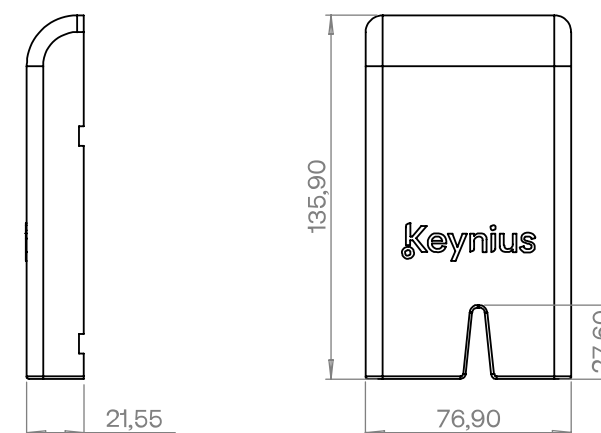



Cover TUX (Wall mount)

11604092 COVER TUX (WALL MOUNT)

- Easy 'Plug & Secure'
- Branding possibilities
- USB charging possibilities
- Locker compartment LED

Technical Specifications

GENERAL

Material housing ABS/PC (Plastic)

POWER


Input DC 12V

Output DC 5V, 1.8A

CERTIFICATIONS

Protection type IP20

Technical Drawing

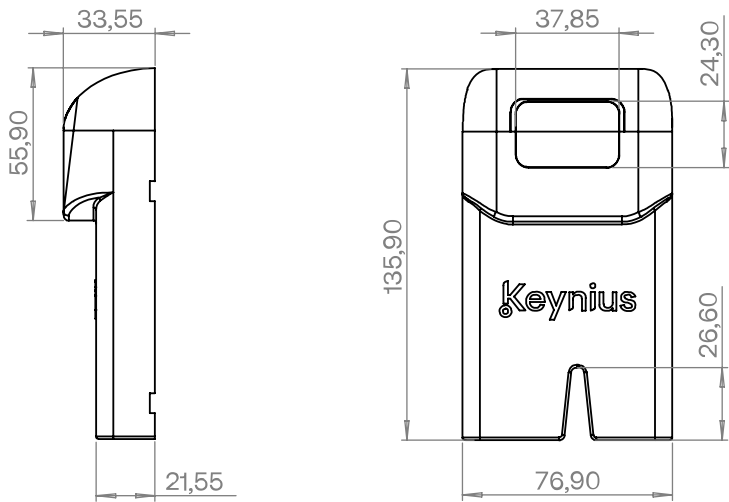



Cover TUX (Profile mount)

11999052 COVER TUX (PROFILE MOUNT)

- Seamless integration with profile
- USB charging possibilities
- Locker compartment LED



SmartCom

11604004 SMARTCOM

- Connect Smart Lock 1.0 + Add-ons
- Connect up to 10 SmartHubs to 1 SmartCom

Technical Specifications

GENERAL

Material housing ABS/PC (Plastic)

POWER


Input DC 12V

Output DC 5V, 1.8A

CERTIFICATIONS

Protection type IP20

Technical Drawing

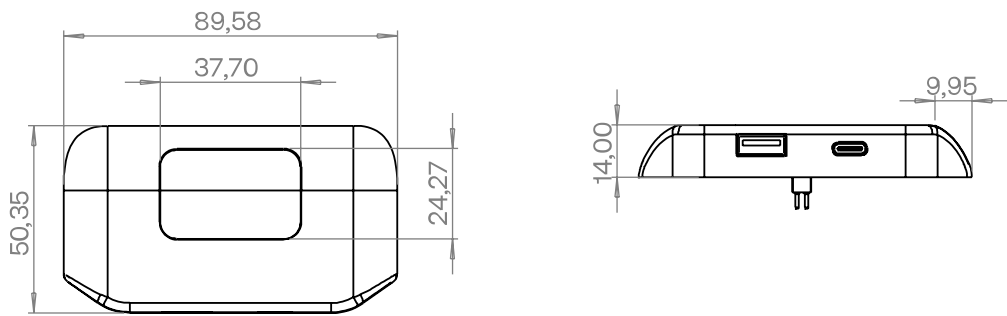

Technical Specifications

GENERAL

Material housing ABS (Plastic)

POWER


Input DC 5V, 1A

CERTIFICATIONS

Compliance CE, RoHS

Protection type IP20

Technical Drawing

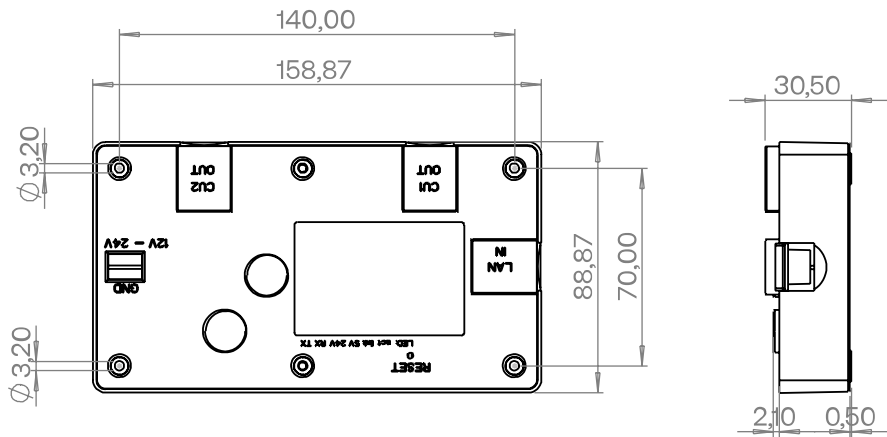



SmartHub

11604002 SMARTHUB (PUSH & POP)

- Connects up to 16 Smart Locks



Smart Lock 1.0 (Rear Cable)

11603012 SMART LOCK 1.0 (REAR-CABLE)

- Mechanical emergency opening
- Cabinet mount or profile mount
- Push & Pop2open by software

Technical Specifications

GENERAL

Material housing ABS (Plastic)

POWER

Input DC 12V, 5A
Requires additional Power connector cable


Should be ordered with SmartHub Power Supply

CERTIFICATIONS

Compliance CE, FCC, RoHS

Protection type IP20

Technical Drawing

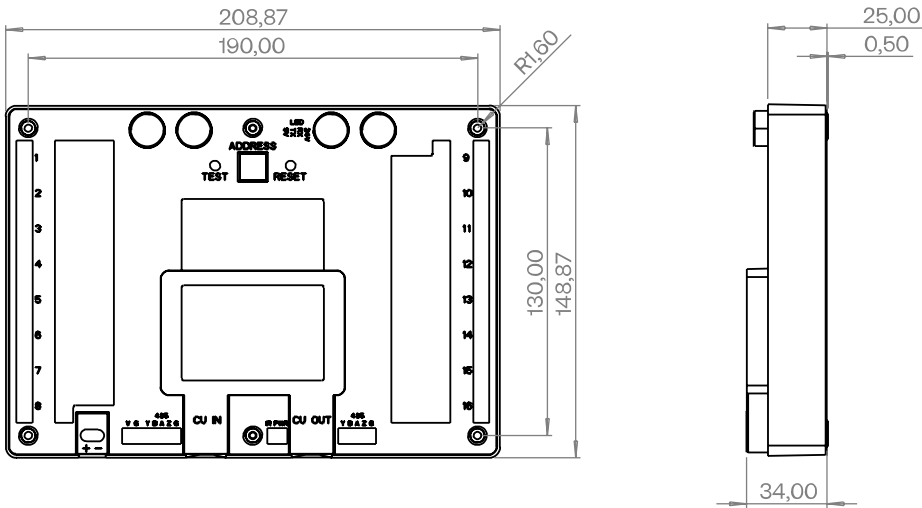

Technical Specifications

GENERAL

Material housing Metal

POWER


Input DC 12V, 2.4A

CERTIFICATIONS

Compliance CE, RoHS

Protection type IP55

Technical Drawing

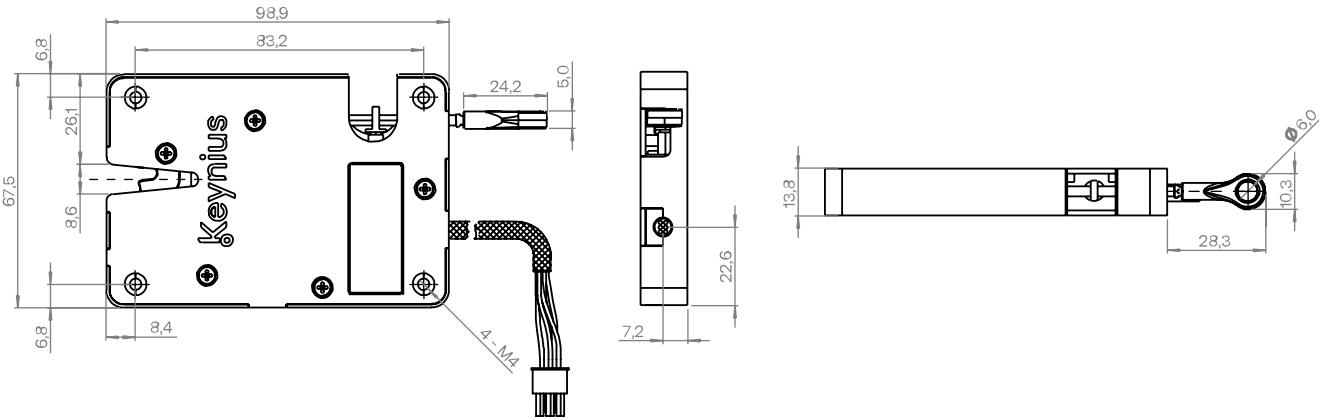



Smart Lock 1.0 Cover

11604093 SMART LOCK 1.0 COVER

- Easy 'Plug & Secure'
- Branding possibilities



Smarty 8 inch

11604007 SMARTY SCREEN (8 INCH)
11999020 SMARTY SCREEN WITH RFID MIFARE (8 INCH)
11999021 SMARTY SCREEN WITH RFID HID (8 INCH)

- Plug & Play
- Extended user possibilities with PIN+RFID
- Administrator login functionalities
- Full range of scenario possibilities

Technical Specifications


GENERAL

Material housing ABC/PC (Plastic)

CERTIFICATIONS

Protection type IP66

Technical Drawing

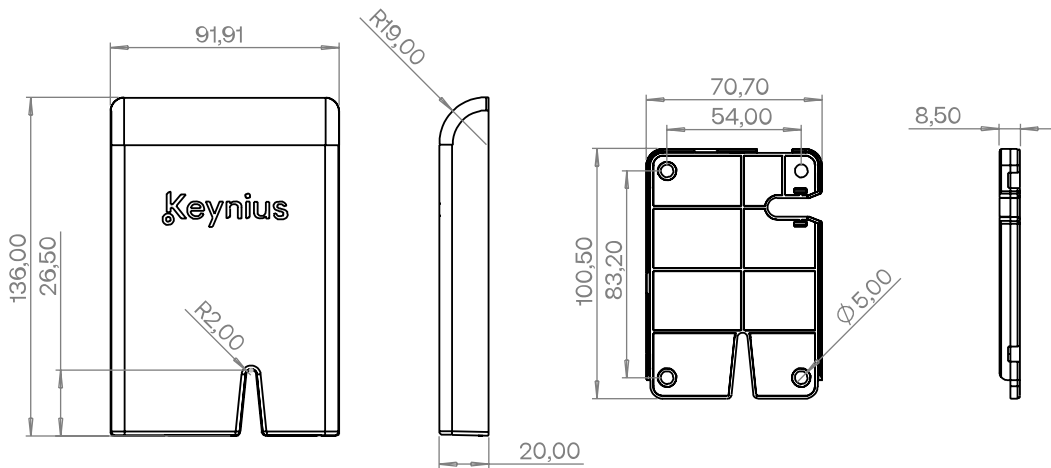

Technical Specifications

GENERAL

Material housing Steel

POWER

Input DC 12, 3A


Comes with Power supply

CERTIFICATIONS

Compliance CE, C-Tick, FCC, PSE, RCM, RF RoHS, SAA, UKCA

Protection type IP60

Technical Drawing

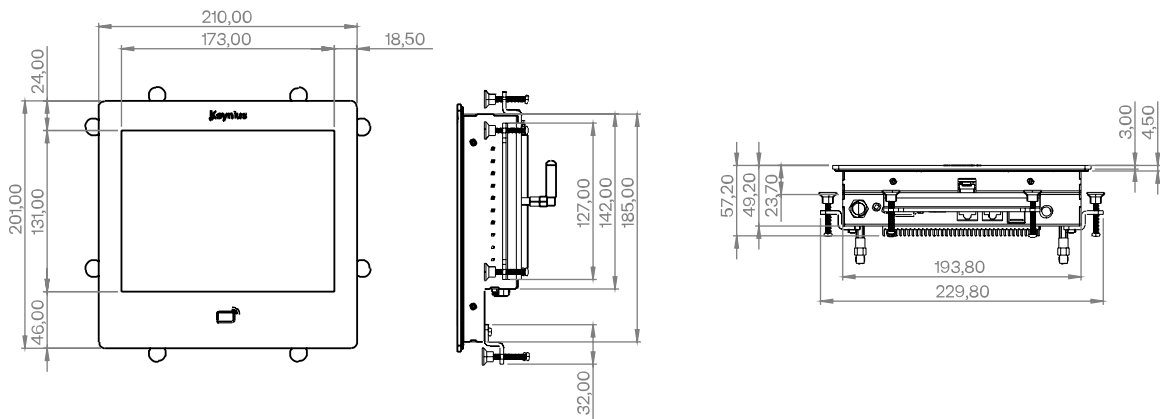



Smarty 8 inch – IP65

- 11604010 SMARTY SCREEN IP65 (8 INCH)
- 11999024 SMARTY SCREEN IP65 WITH RFID MIFARE (8 INCH)
- 11999025 SMARTY SCREEN IP65 WITH RFID HID (8 INCH)

- IP65 weatherproofing
- Extended user possibilities with PIN+RFID
- Administrator login functionalities
- Full range of scenario possibilities



Smarty 15 inch


- 11604009 SMARTY SCREEN (15 INCH)
- 11999026 SMARTY SCREEN WITH RFID MIFARE (15 INCH)
- 11999027 SMARTY SCREEN WITH RFID HID (15 INCH)

- Plug & Play
- Extended user possibilities with PIN+RFID
- Administrator login functionalities
- Full range of scenario possibilities

Technical Specifications

GENERAL	
Material housing	Steel
POWER	
Input	DC 12, 3A
Comes with	Power supply
CERTIFICATIONS	
Compliance	CE, C-Tick, FCC, PSE, RCM, RF RoHS, SAA, UKCA
Protection type	IP60


Technical Drawing

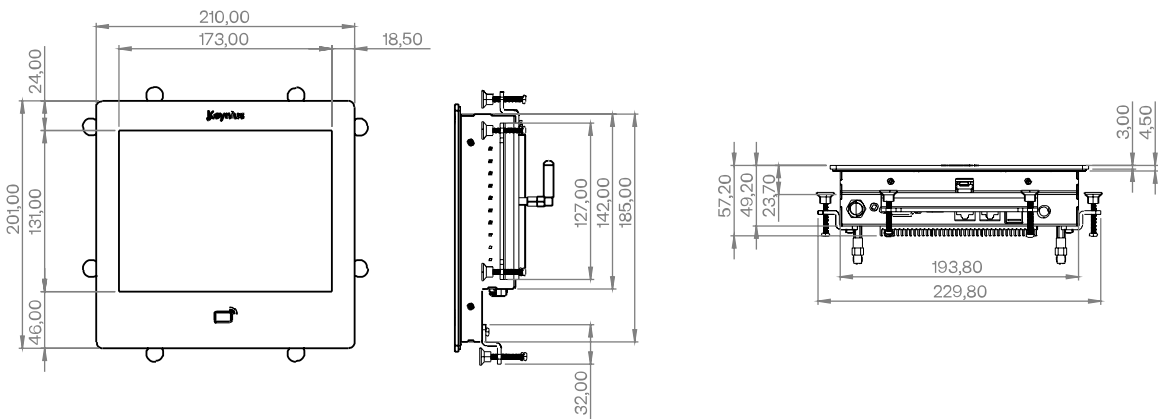

Technical Specifications

GENERAL	
Material housing	Steel
POWER	
Input	DC 12, 7A
Comes with	Power supply
CERTIFICATIONS	
Compliance	CE, C-Tick, FCC, PSE, RCM, RF RoHS, SAA, UKCA
Protection type	IP60

Technical Drawing

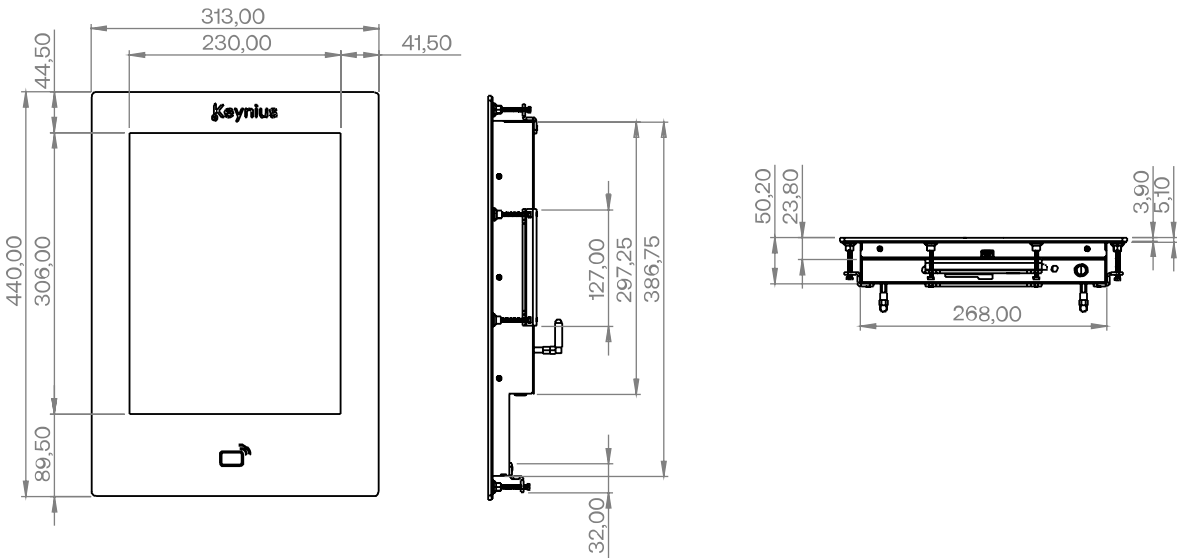



Smarty 15 inch – IP65

11604020 SMARTY SCREEN IP65 (15 INCH)
11999030 SMARTY SCREEN IP65 WITH RFID MIFARE (15 INCH)
11999031 SMARTY SCREEN IP65 WITH RFID HID (15 INCH)

- IP65 weatherproofing
- Extended user possibilities with PIN+RFID
- Administrator login functionalities
- Full range of scenario possibilities

Technical Specifications

GENERAL

Material housing	Steel
------------------	-------


POWER

Input	DC 12, 7A
Comes with	Power supply

CERTIFICATIONS

Compliance	CE, C-Tick, FCC, PSE, RCM, RF RoHS, SAA, UKCA
Protection type	IP65

Technical Drawing

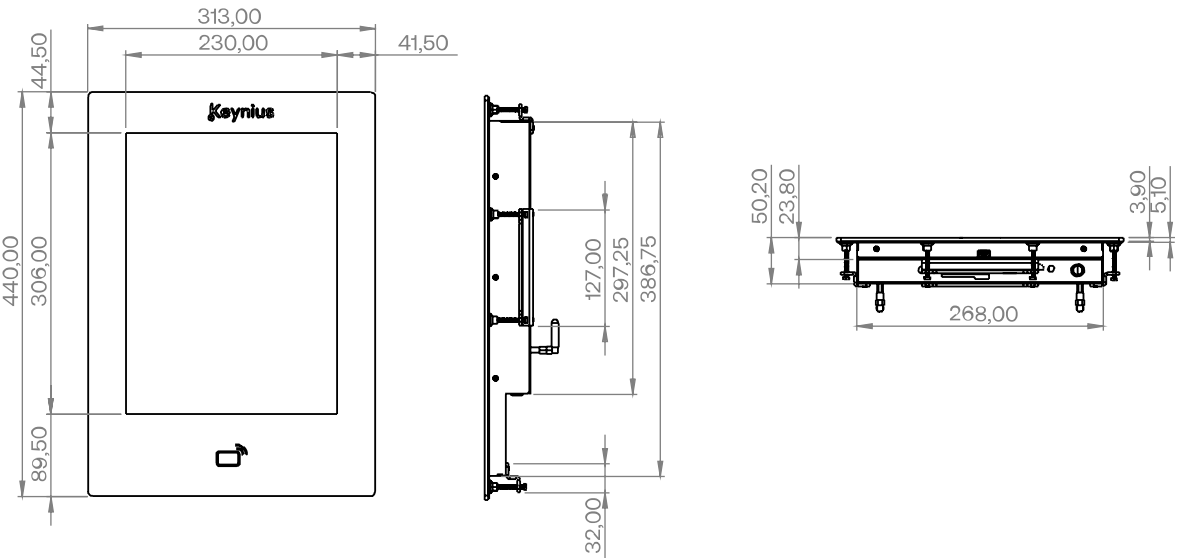



Smarty without Screen

11604016 SMARTY WITHOUT SCREEN

- Plug & Play
- Administrator login functionalities
- Full range of scenario possibilities



Basic RFID Reader (MiFare)

11604013 BASIC RFID READER (MIFARE)

- NFC Versatility
- Detects tags up to 30 mm away (depends on tag specifics)
- Works with ISO 14443 A/B, MIFARE, FeliCa, and ISO 18092 NFC tags

Technical Specifications

GENERAL

Material housing	Steel
------------------	-------


POWER

Input	DC 12V, 5A
Comes with	Power supply

CERTIFICATIONS

Compliance	CE, FCC, LVD, RoHS
Protection type	IP20

Technical Drawing

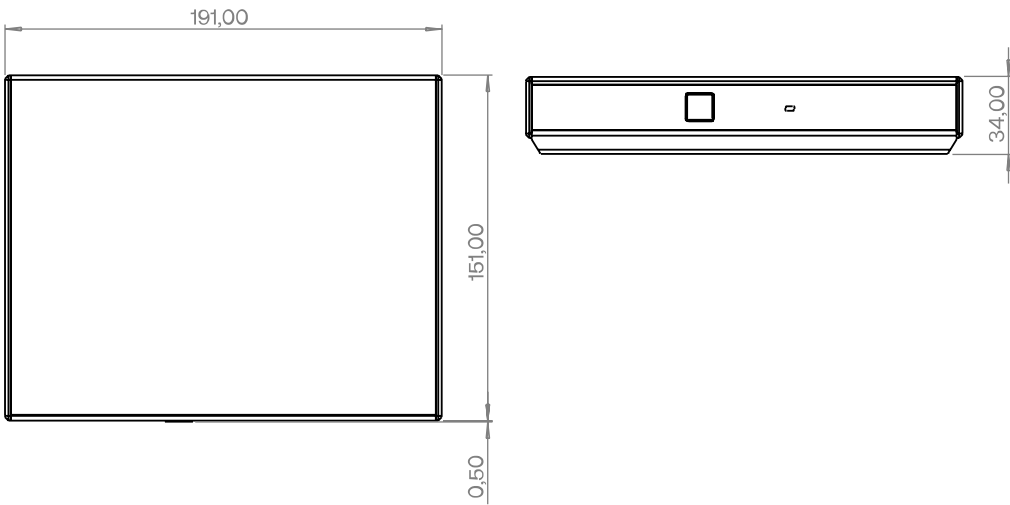

Technical Specifications


POWER

Input	5V, 0.2A
-------	----------

CERTIFICATIONS

Compliance	ISO 14443, ISO 18092, USB Full Speed, PC/SC, CCID, CE, FCC, RoHS, REACH, Microsoft ® WHQL
Protection type	IP20

Technical Drawing

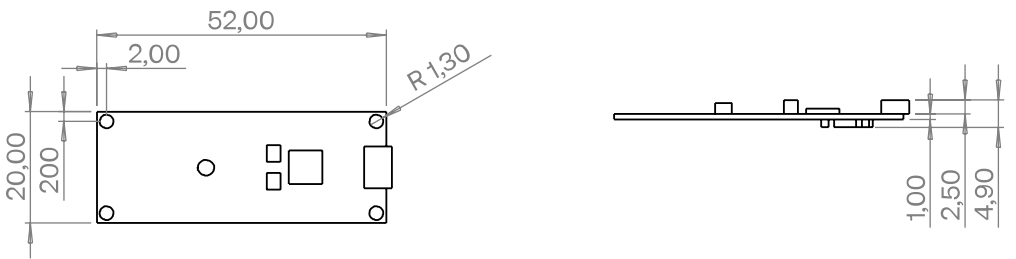




Advanced RFID Reader (HID)

11604041 ADVANCED RFID READER (HID)

- Powerfull Processor
- Wireless Connectivity
- Advanced encryption and multi-modal biometrics
- HID Compatible

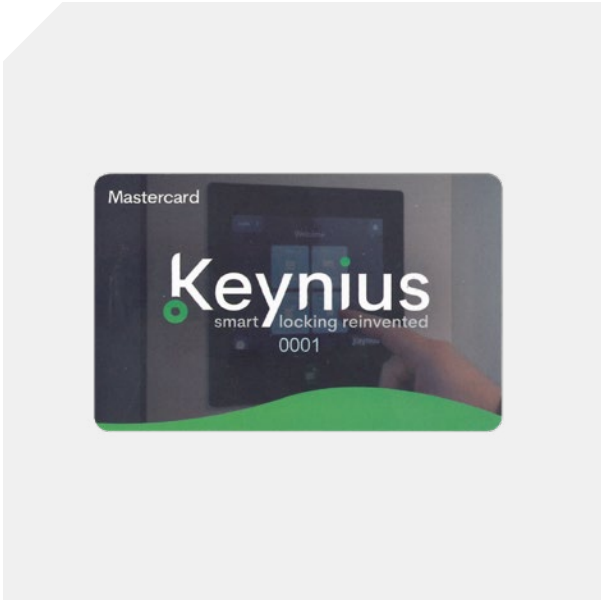

RFID Master Card

11604038 RFID MASTER CARD

Technical Specifications

POWER



Input 5V, 0.2A

CERTIFICATIONS

Compliance ROHS, REACH, WEEE, IEC 60950-1, CE, UKCA, FCC Modular, IC (Canada)

Protection type IP20

Technical Drawing

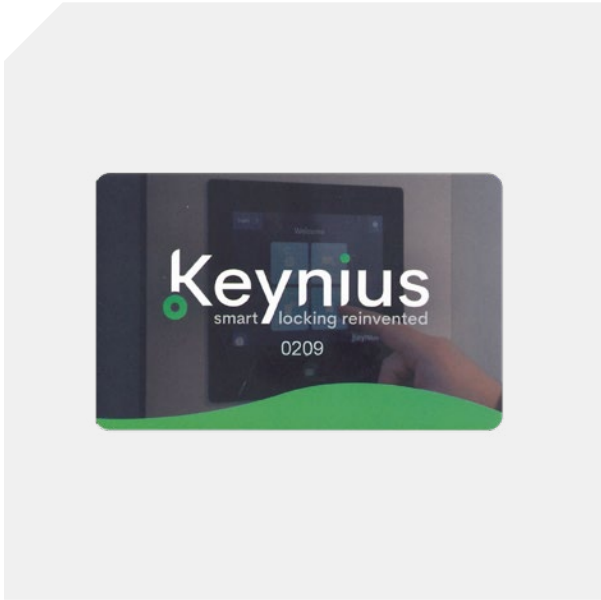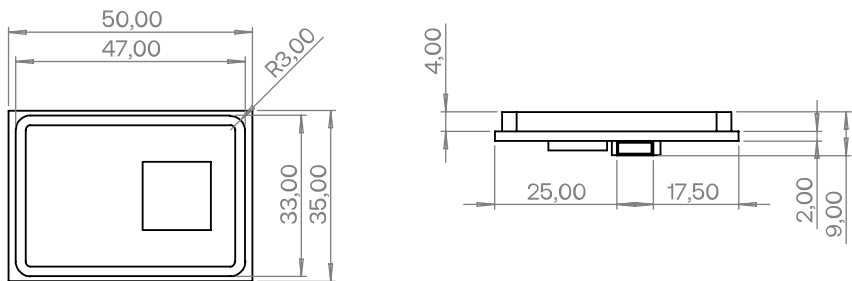

RFID User Card

11604034 RFID USER CARD



QR-Code Reader – IP66

11604045 QR-CODE READER – IP66

- IP66 Weather Resistance: Designed for outdoor use
- Seamless Integration: Easily pairs with Keynius products
- QR Code Technology: Easy access control with QR code scanning



Payment Terminal Contactless & Pin

11990001 PAYMENT TERMINAL CONTACTLESS & PIN EU
11990011 PAYMENT TERMINAL CONTACTLESS & PIN USA
11990012 PAYMENT TERMINAL CONTACTLESS & PIN UK
11990013 PAYMENT TERMINAL CONTACTLESS & PIN OTHER

- Cellular communication antenna
- Sim card (pre-installed)
- Barcode/qr code scanning camera (optional)

Technical Specifications

GENERAL

Material housing ABS (Plastic)

POWER


Input DC 5V - 12V, 0.16A

CERTIFICATIONS

Compliance CE

Protection type IP66

Technical Drawing

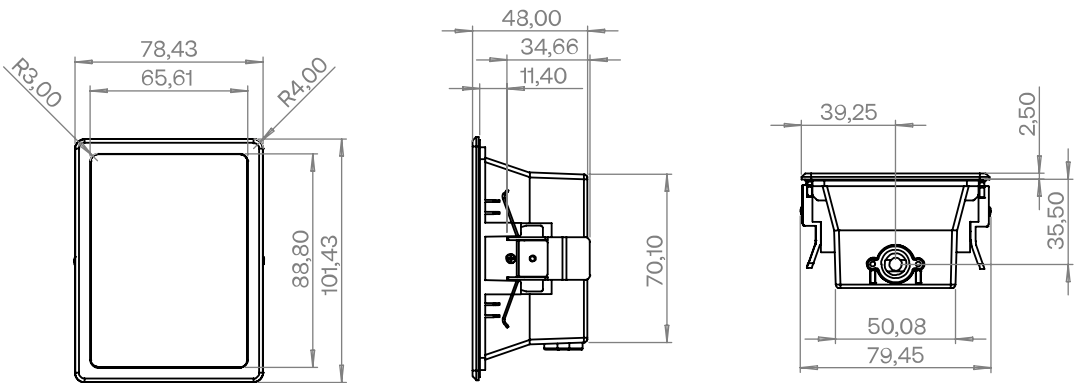

Technical Specifications

GENERAL

Material housing PC (Plastic)

POWER

Input DC 9V - 48V, 1A


Comes with Power supply

CERTIFICATIONS

Compliance CE, UKCA

Protection type IP65

Technical Drawing

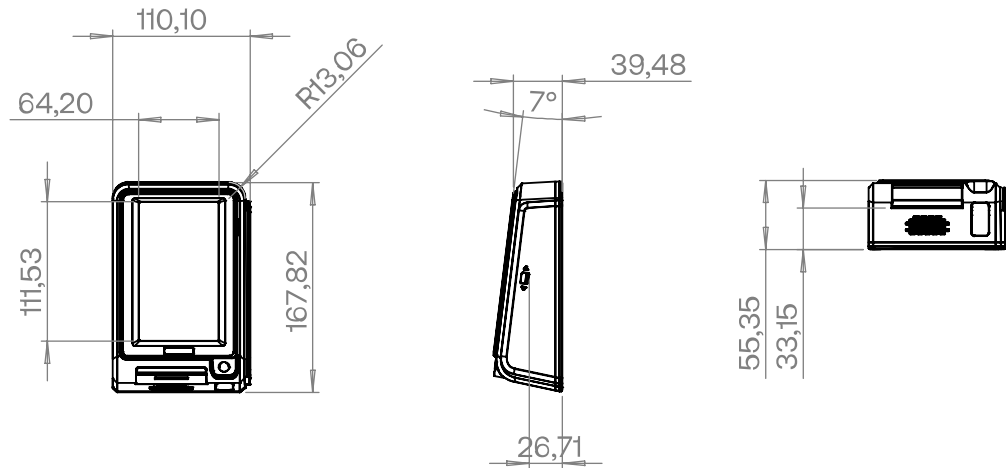




4G Router RUT241

116040554G ROUTER RUT241 EU
116040594G ROUTER RUT241 UK




Netgear Unmanaged Switch 5 ports

11604096 NETGEAR UNMANAGED SWITCH 5 PORTS

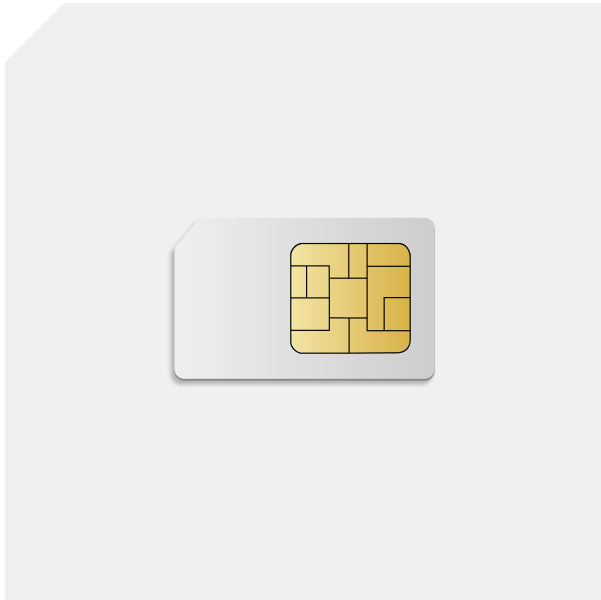

Simcard 10gb EU only

11604087 SIMCARD 10GB EU ONLY

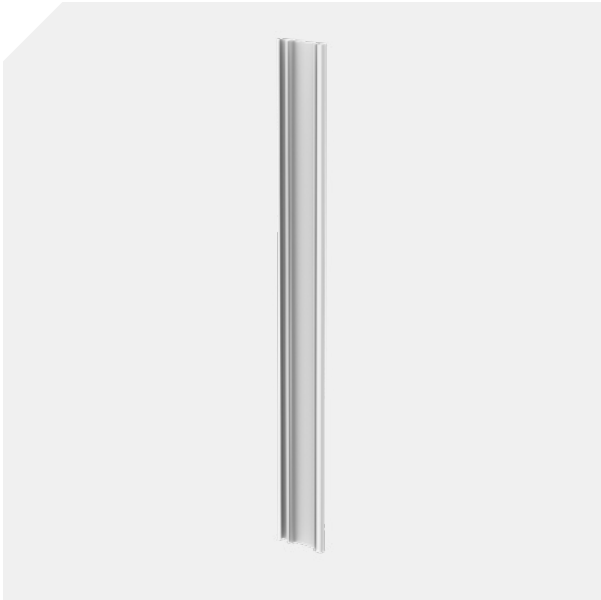

Lock Profile

11604031 KEYNIUS PVC PROFILE 1780MM – WHITE
11604032 KEYNIUS PVC PROFILE 2100MM – WHITE
11604131 KEYNIUS PVC PROFILE 1780MM – GREY
11604132 KEYNIUS PVC PROFILE 2100MM – GREY


- Plug & Play
- Designed for Smartlock 1.0 and Smartlock RENÉ
- Available in 1780mm and 2100mm
- Designed for locks with mechanical emergency opening


Technical Specifications

GENERAL

Material	PVC
----------	-----

Technical Drawing

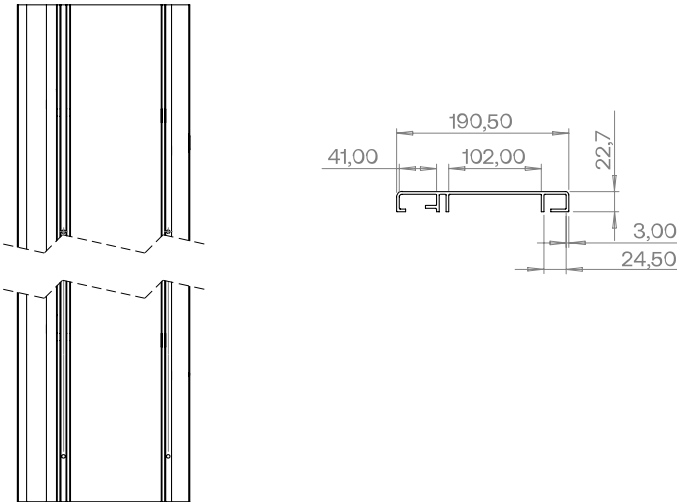

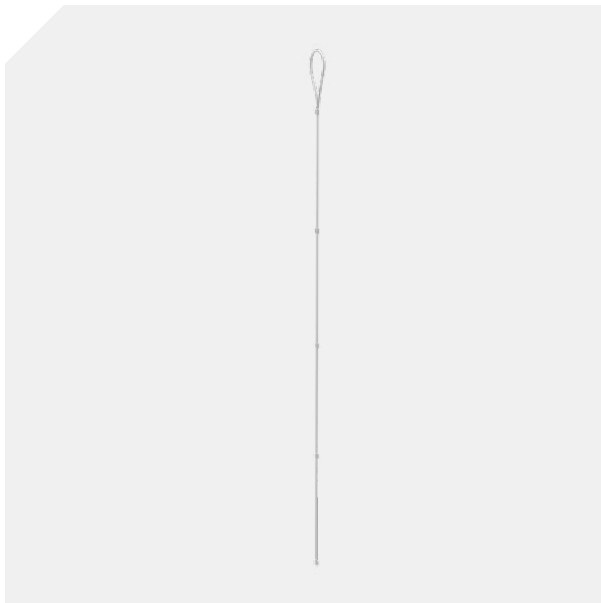

Mechanical Emergency Opening Wire + Clamp 2000mm

11604018 MECHANICAL EMERGENCY OPENING WIRE + CLAMP 2000



UPS 1 hour

11604060 UPS 1 HOUR

Cables

Smarty RFID Cable USB (90 degrees)




11604037

0.2m

Black

Lock Cable RENÉ (Normal)

Flat cables for easy cable management



11603061

1m

Red



11603062

2m


Green



11603063

3m

Blue



11603064

4m

Orange



11603065

5m

Yellow

Lock Cable RENÉ (RFID)

Shielded twisted pair cables with a round wiring harness



11603080

1m

Red



11603081

2m

Green



11603082

3m

Blue



11603083

4m

Orange




11603084

5m

Yellow

Lock Cable Smart Lock RENÉ to SmartHub 1.0

Cables with a round wiring harness

		
11602995	11602996	11602993
1m	2m	3m
Red	Green	Blue

Lock Cable 1.0


Cables with a round wiring harness

				
11603002	11603003	11603004	11603005	11603006
1m	2m	3m	4m	5m
Red	Green	Blue	Orange	Yellow

Ethernet Cable CAT6

Shielded twisted pair cables with a round wiring harness

				
11604125	11604123	11604126	11604128	11604129
1m	2m	3m	5m	7.5m
Red	Green	Blue	Yellow	Black

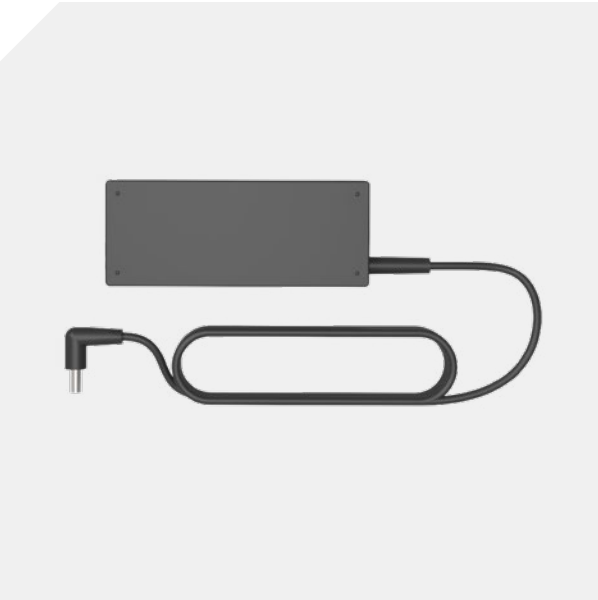


Smart Home Power Supply


11604080 SMART HOME POWER SUPPLY

Technical Specifications

POWER	
Input	100-240V ~ 2.5 A max
Output	DC 12V, 7A
CERTIFICATIONS	
Compliance	CB, CCC, CE, FCC, KC, KCC, PSE, RoHS, SAA, UKCA, UL
Protection type	IP20

Technical Drawing

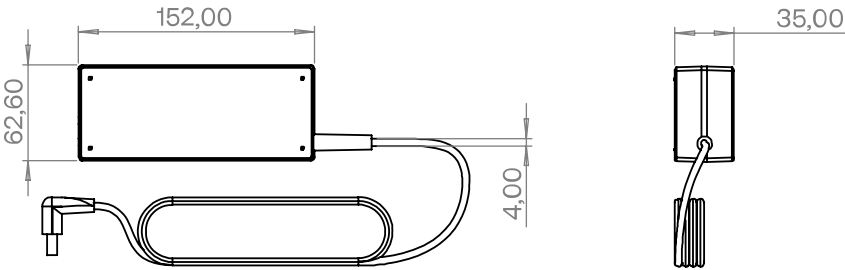

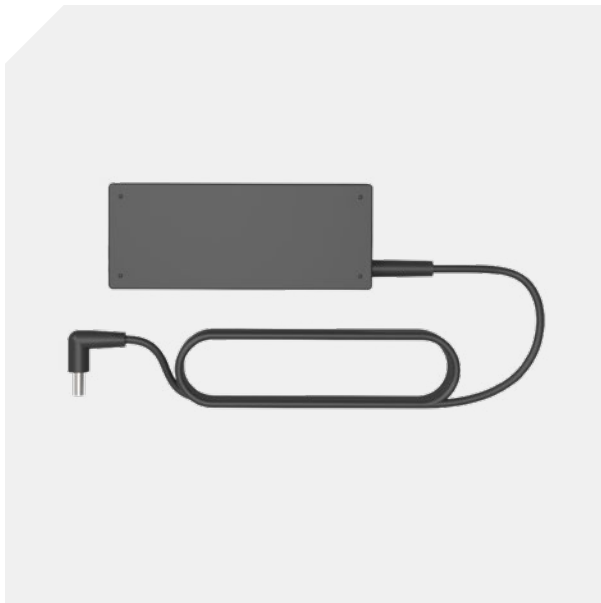

SmartHub Power Supply

11604002 SMARTHUB POWER SUPPLY

Technical Specifications


POWER

Input	100-240V ~ 2.0A
Output	DC 12V, 5A

CERTIFICATIONS

Compliance	CE, C-Tick, FCC, GS, SAA, UKCA, UL
Protection type	IP20

Technical Drawing

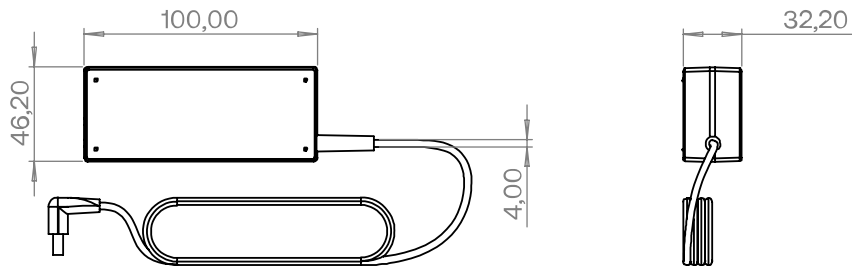

Power Connectors C5



11604076

Switzerland

Type J



11604075

India

Type D, M



11604074

EU

Type C, E, F, G, J, K, L



11604073

UK/Hong Kong

Type G



11604071

USA/Canada

Type A, B



11604057

Australia/NZ/CN

Type I



11999010

Israel

Type H

Battery Lock LEO

PIN

Vertical	Vertical IP65	Horizontal	Horizontal IP65
			
11609000	11610006	11610007	11610008

Rental

Vertical	Vertical IP65	Horizontal	Horizontal IP65
			
11609000R	11610006R	11610007R	11610008R

RFID

Vertical	Vertical IP65	Horizontal	Horizontal IP65
			
11609001	11610003	11610004	11610005





Battery Lock LEO PIN

11609000 BATTERY LOCK LEO PIN

- Capacitive touch (user friendly)
- Robust construction
- Manage and use with Keynius mobile app
- BLE (Bluetooth Low Energy) connection



Battery Lock LEO PIN – IP65

11610006 BATTERY LOCK LEO PIN – IP65

- IP65 weatherproofing
- Robust construction
- Manage and use with Keynius mobile app
- BLE (Bluetooth Low Energy) connection

Technical Specifications

GENERAL

Material housing	Zinc-alloy
------------------	------------


POWER

Input	4x AA 1.5v Batteries
-------	----------------------

CERTIFICATIONS

Compliance	CE, CoO, C-Tick, FCC, RCM, RF, RoHS, UKCA
Protection type	IP50

Technical Drawing

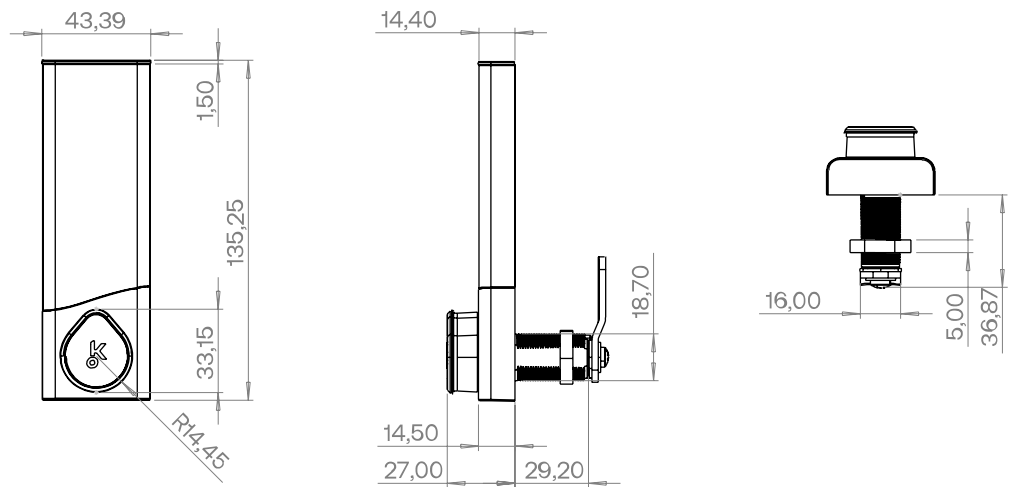

Technical Specifications

GENERAL

Material housing	Zinc-alloy
------------------	------------


POWER

Input	4x AA 1.5v Batteries
-------	----------------------

CERTIFICATIONS

Compliance	CE, CoO, C-Tick, FCC, RCM, RF, RoHS, UKCA
Protection type	IP65

Technical Drawing

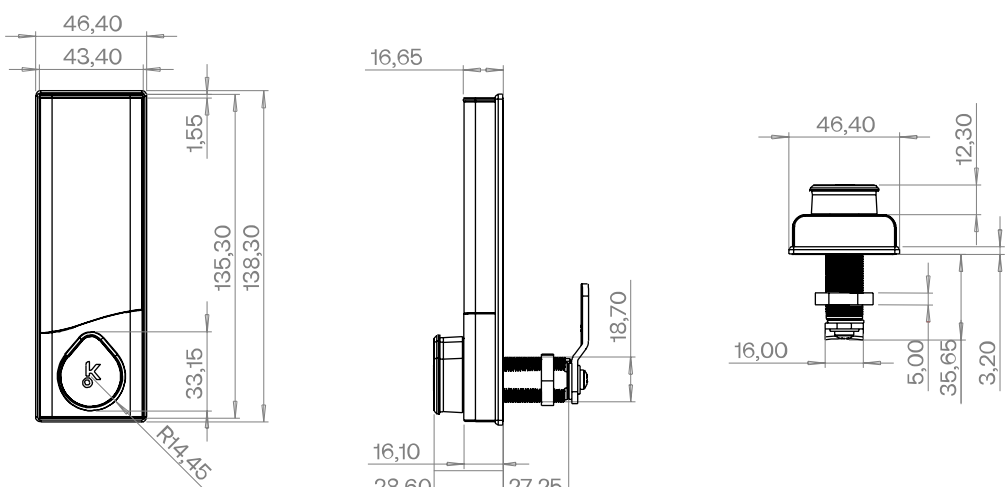



Battery Lock LEO Horizontal PIN

11610007 BATTERY LOCK LEO HORIZONTAL PIN

- Capacitive touch (user friendly)
- Robust construction
- Manage and use with Keynius mobile app
- BLE (Bluetooth Low Energy) connection



Battery Lock LEO Horizontal PIN – IP65

11610008 BATTERY LOCK LEO HORIZONTAL PIN – IP65

- Capacitive touch (user friendly)
- Robust construction
- Manage and use with Keynius mobile app
- BLE (Bluetooth Low Energy) connection

Technical Specifications

GENERAL

Material housing	Zinc-alloy
------------------	------------


POWER

Input	4x AA 1.5v Batteries
-------	----------------------

CERTIFICATIONS

Compliance	CE, CoO, C-Tick, FCC, RCM, RF, RoHS, UKCA
Protection type	IP50

Technical Drawing

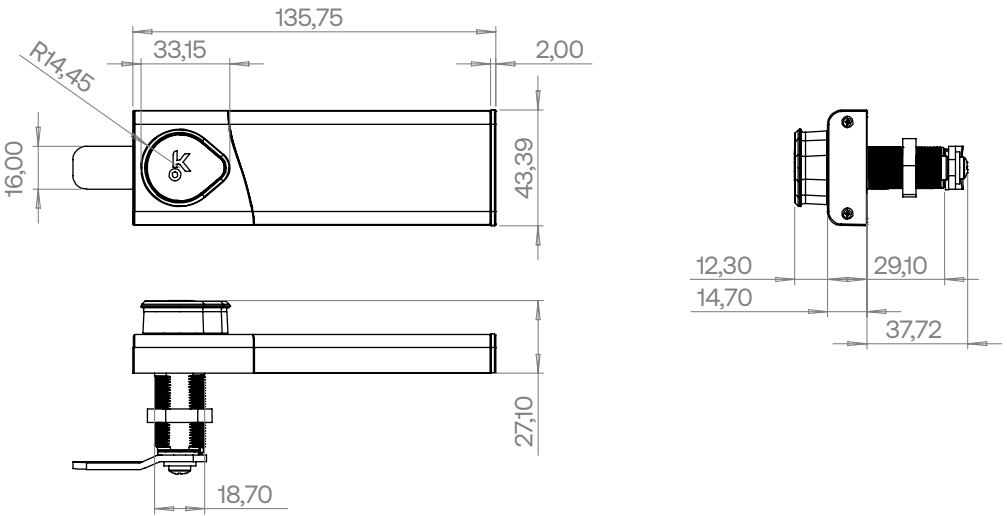

Technical Specifications

GENERAL

Material housing	Zinc-alloy
------------------	------------


POWER

Input	4x AA 1.5v Batteries
-------	----------------------

CERTIFICATIONS

Compliance	CE, CoO, C-Tick, FCC, RCM, RF, RoHS, UKCA
Protection type	IP65

Technical Drawing

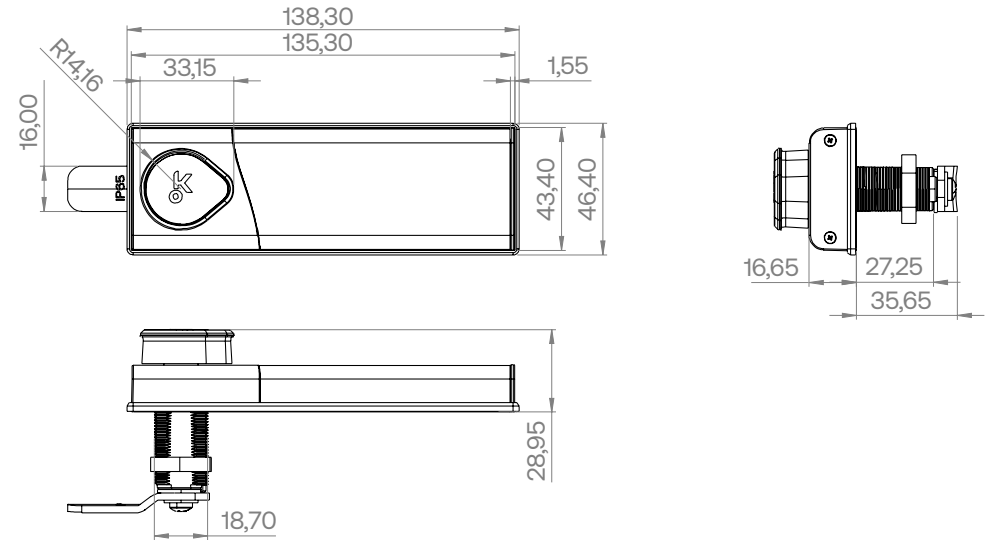



Battery Lock LEO PIN – Rental

11609000R BATTERY LOCK LEO PIN – RENTAL

- Slim design
- Robust construction
- Remote Allocation System (RAS)
- Customisable Web App



Battery Lock LEO PIN – IP65 – Rental

11610006R BATTERY LOCK LEO PIN – IP65 – RENTAL

- Slim design
- Robust construction
- Remote Allocation System (RAS)
- Customisable Web App

Technical Specifications

GENERAL

Material housing	Zinc-alloy
------------------	------------


POWER

Input	4x AA 1.5v Batteries
-------	----------------------

CERTIFICATIONS

Compliance	CE, CoO, C-Tick, FCC, RCM, RF, RoHS, UKCA
Protection type	IP50

Technical Drawing

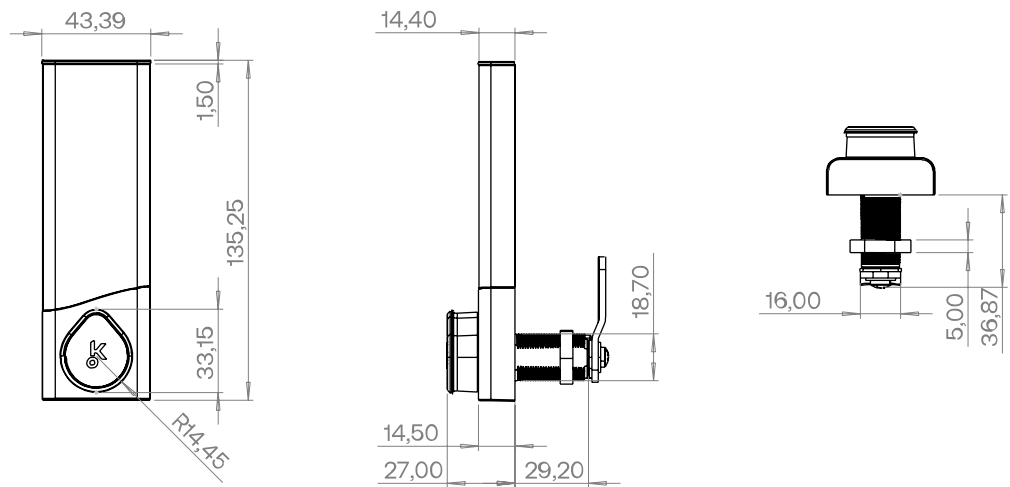

Technical Specifications

GENERAL

Material housing	Zinc-alloy
------------------	------------


POWER

Input	4x AA 1.5v Batteries
-------	----------------------

CERTIFICATIONS

Compliance	CE, CoO, C-Tick, FCC, RCM, RF, RoHS, UKCA
Protection type	IP65

Technical Drawing

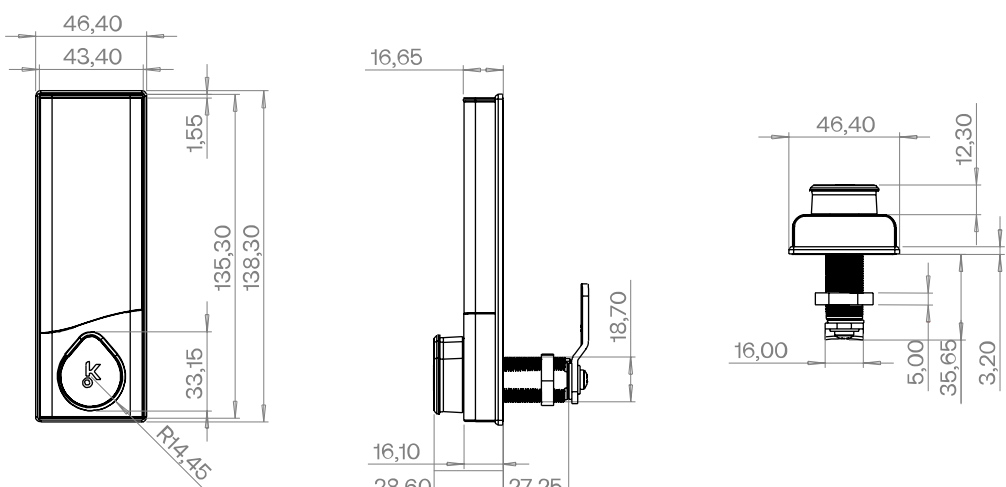



Battery Lock LEO RFID

11609001 BATTERY LOCK LEO RFID

- Slim design
- Robust construction
- Manage and use with Keynius mobile app
- BLE (Bluetooth Low Energy) connection



Battery Lock LEO

RFID – IP65

11610003 BATTERY LOCK LEO RFID – IP65

- IP65 weatherproofing
- Robust construction
- Manage and use with Keynius mobile app
- BLE (Bluetooth Low Energy) connection

Technical Specifications

GENERAL

Material housing	Zinc-alloy
------------------	------------


POWER

Input	4x AA 1.5v Batteries
-------	----------------------

CERTIFICATIONS

Compliance	CE, CoO, C-Tick, FCC, RCM, RF, RoHS, UKCA
Protection type	IP50

Technical Drawing

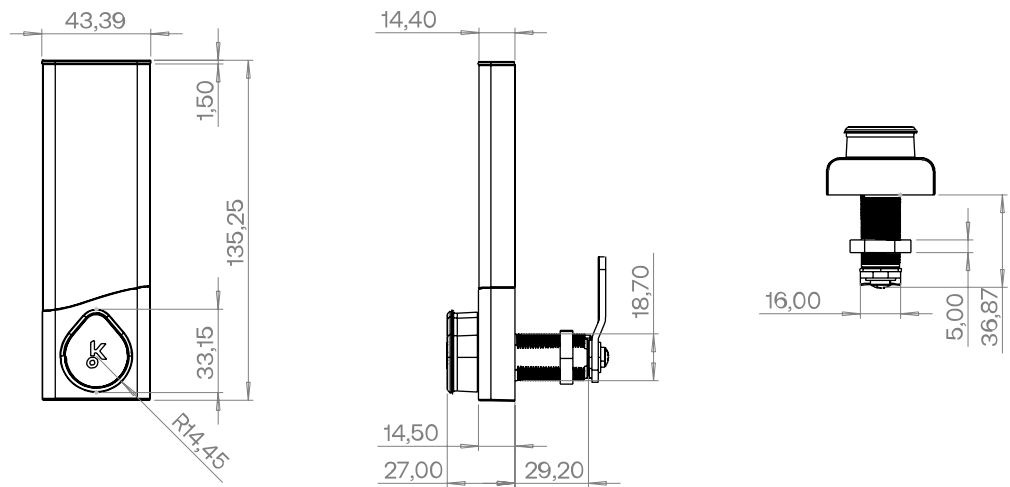

Technical Specifications

GENERAL

Material housing	Zinc-alloy
------------------	------------


POWER

Input	4x AA 1.5v Batteries
-------	----------------------

CERTIFICATIONS

Compliance	CE, CoO, C-Tick, FCC, RCM, RF, RoHS, UKCA
Protection type	IP65

Technical Drawing

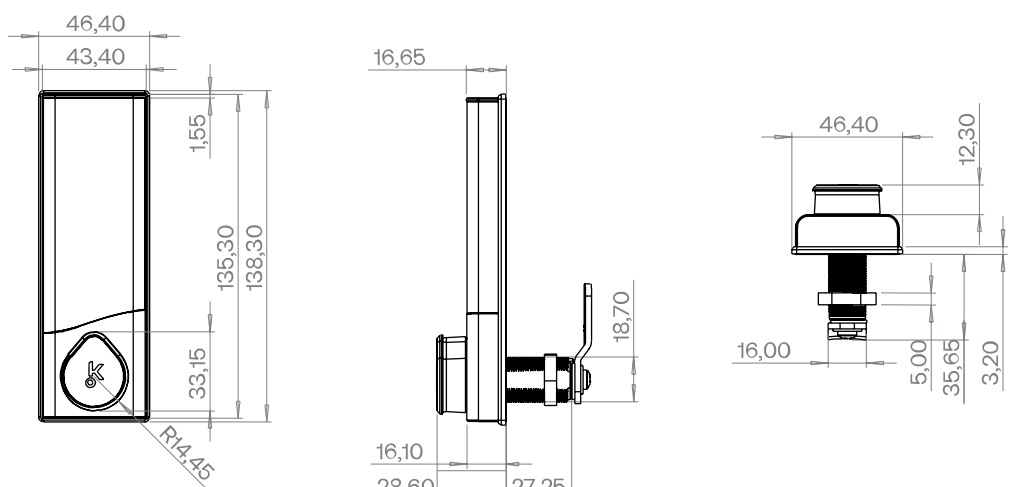



Battery Lock LEO Horizontal RFID

11610004 BATTERY LOCK LEO HORIZONTAL RFID

- Slim design
- Robust construction
- Manage and use with Keynius mobile app
- BLE (Bluetooth Low Energy) connection



Battery Lock LEO Horizontal RFID - IP65

11610005 BATTERY LOCK LEO HORIZONTAL RFID - IP65

- IP65 weatherproofing
- Robust construction
- Manage and use with Keynius mobile app
- BLE (Bluetooth Low Energy) connection

Technical Specifications

GENERAL

Material housing	Zinc-alloy
------------------	------------


POWER

Input	4x AA 1.5v Batteries
-------	----------------------

CERTIFICATIONS

Compliance	CE, CoO, C-Tick, FCC, RCM, RF, RoHS, UKCA
Protection type	IP50

Technical Drawing

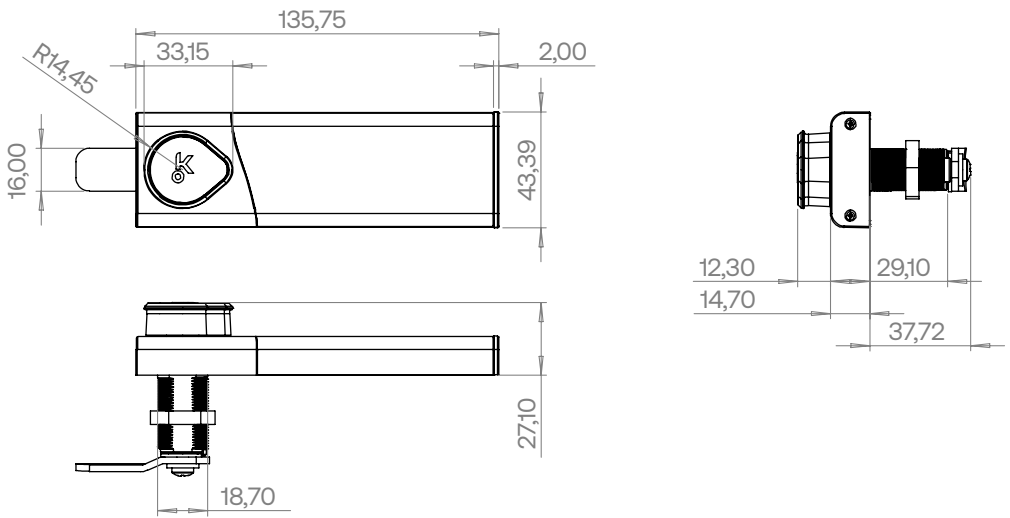

Technical Specifications

GENERAL

Material housing	Zinc-alloy
------------------	------------


POWER

Input	4x AA 1.5v Batteries
-------	----------------------

CERTIFICATIONS


Compliance	CE, CoO, C-Tick, FCC, RCM, RF, RoHS, UKCA
Protection type	IP65

Technical Drawing

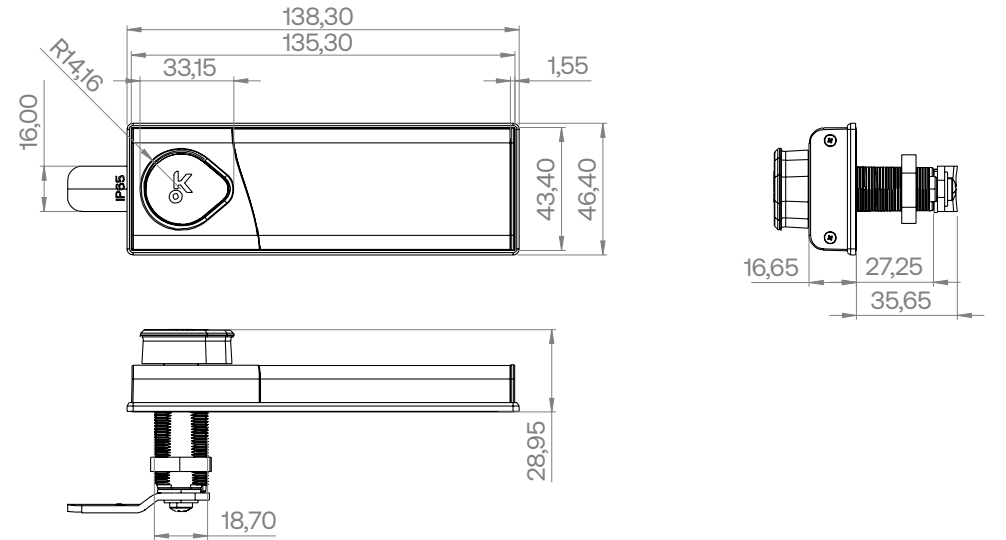


Battery Lock LEO RFID Cards

Master Card

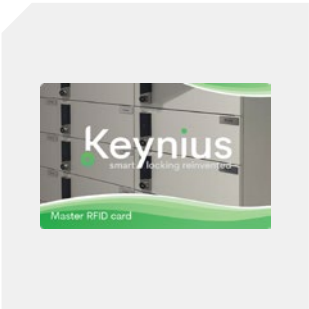

11614038


User Card

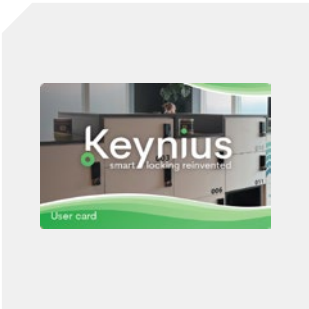

11614039

Functionality Cards

Change Master Card

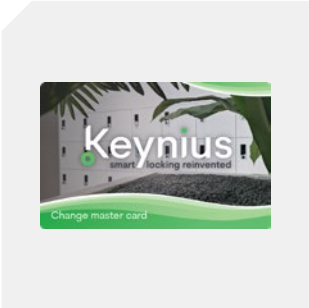


11604300

Change Scenario




11604301

Change User Card

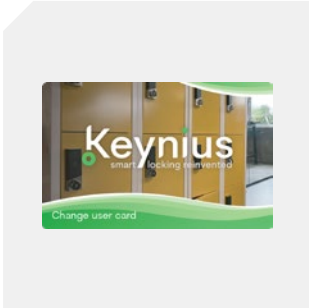


11604302

Disable/Enable Bluetooth

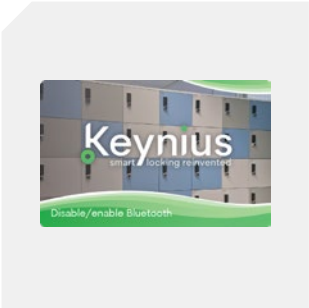

11604303

Reset Lock

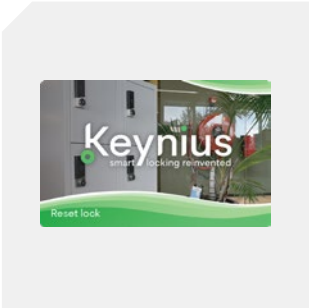


11604304

RFID Cards Package



11604305

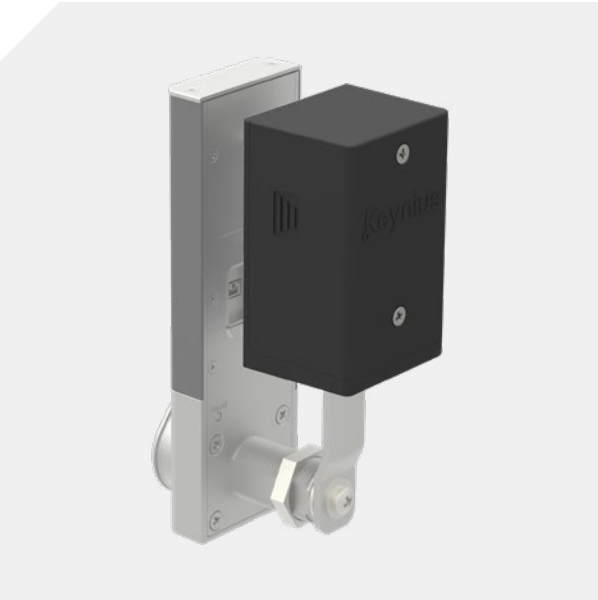

Battery Lock LEO Battery Pack SQUARE

11609904 BATTERY PACK SQUARE

- Easy to mount
- Battery life up to 5 years
- Easy battery replacement
- Perfect sized for even the smallest lockers

Technical Specifications


GENERAL

Material housing	ABS
------------------	-----

POWER

Input	4x AA 1.5v Batteries
Protection type	IP50

Technical Drawing

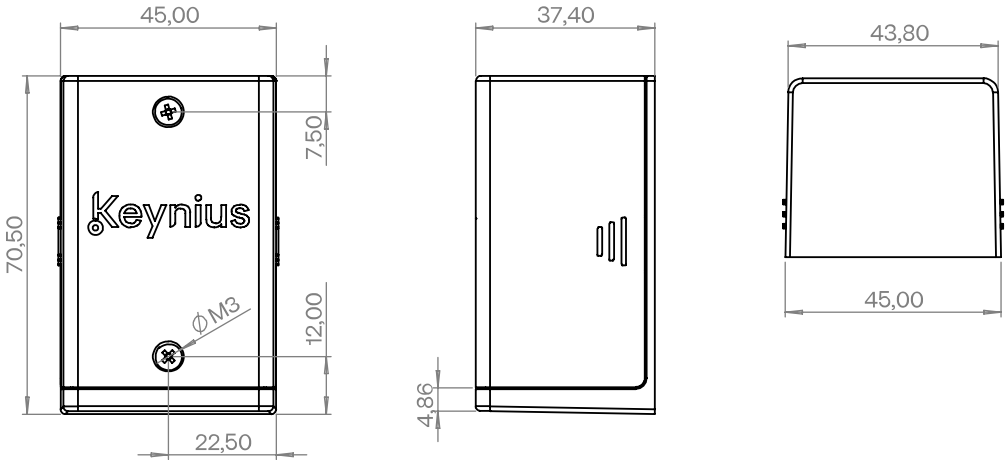



Battery Lock LEO Battery Pack TALL

11609905 BATTERY PACK TALL

- Easy to mount
- Battery life up to 5 years
- Easy battery replacement
- Slim design matching the Battery lock LEO aesthetics

Technical Specifications


GENERAL

Material housing	ABS
------------------	-----

POWER

Input	4x AA 1.5v Batteries
Protection type	IP50

Technical Drawing

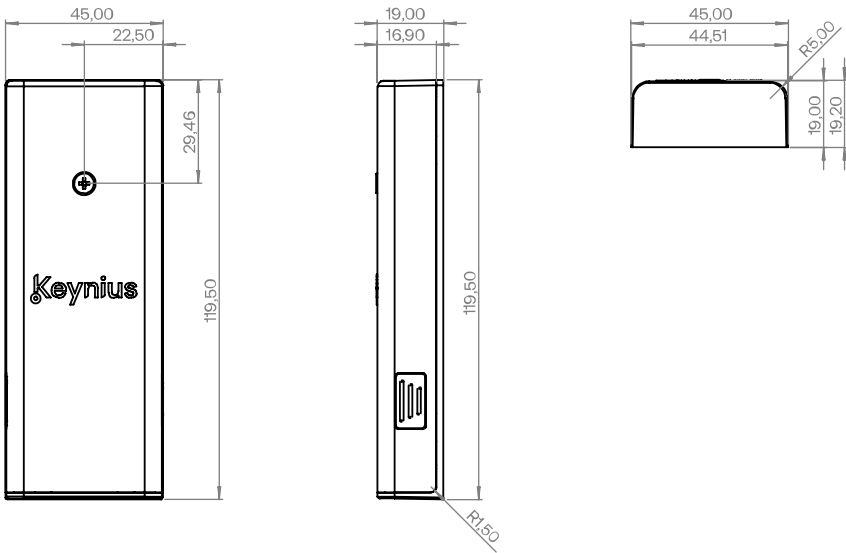


Battery Lock LEO Mounting Hardware

The installation packages contain:


- 2 screws to mount the battery pack to the front of the lock
- 2 screws to mount the battery pack cover
- 1 screw to mount the latch
- 1 latch
- 1 rotation limitation plate
- 1 cylinder ring (nut)

Installation package 1-2mm (Metal)

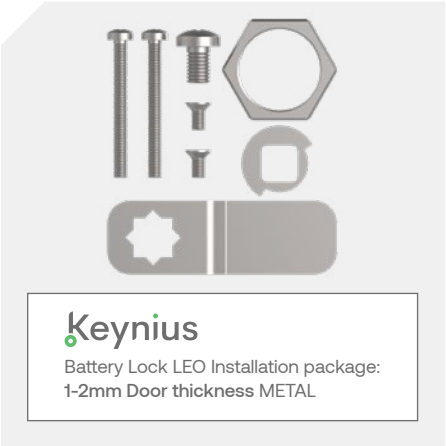


11610011

Installation package 8-9mm (HPL)

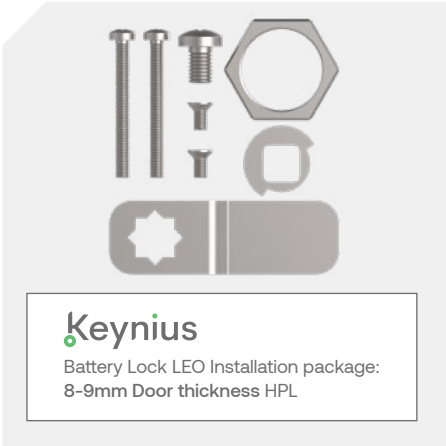


11610010

Installation package 12-13mm (HPL)

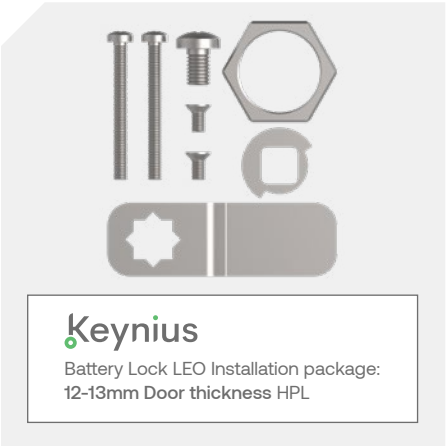


11610013

Installation package 18mm (Wood)

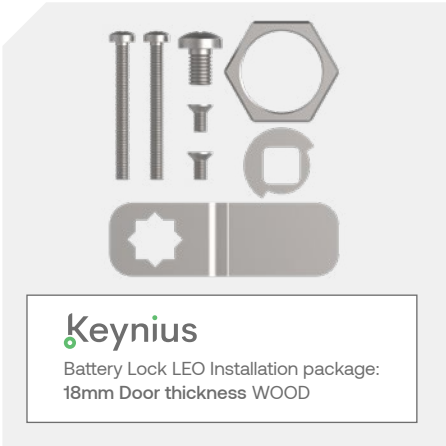


11610009

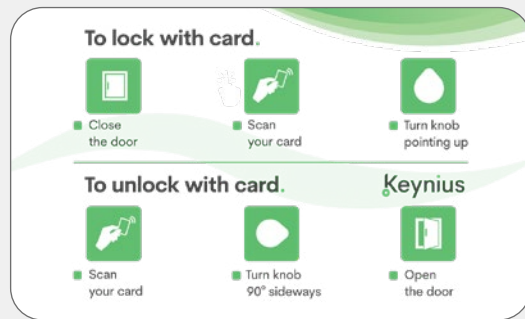

RFID Infographic stickers

11604307

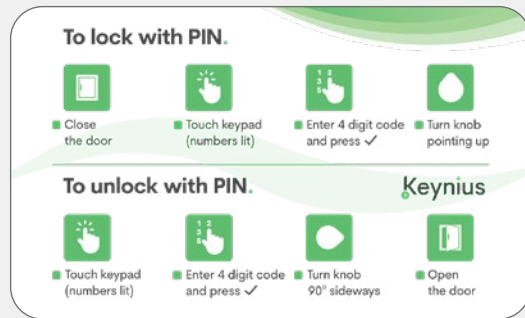

PIN Infographic stickers

11604306

Battery Lock LEO Demo Package

11976000 BATTERY LOCK LEO DEMO PACKAGE

The Battery Lock LEO Demo Package contains:

- Appreciation letter from the Keynius CEO
- Keynius Product Brochure
- Keynius Battery Lock LEO RFID
- Keynius Battery Lock LEO PIN
- Keynius RFID User card
- Keynius RFID Master card
- Keynius Smart Waffles (tasty snack)

Rescue 5V

11999040 KEYNIUS RESCUE 5V

- Portable design
- Compatible with all Battery lock LEO types
- Opens up to 3500 Battery Lock Leo locks on one full charge
- 5000mAh battery capacity



Technical Specifications

GENERAL

Material housing ABS + PC (Plastic)

POWER

Input DC 5V, 2.1A


Output DC 5V, 2.1A

CERTIFICATIONS

Compliance FCC, RoHS

Protection type IP55

Technical Drawing

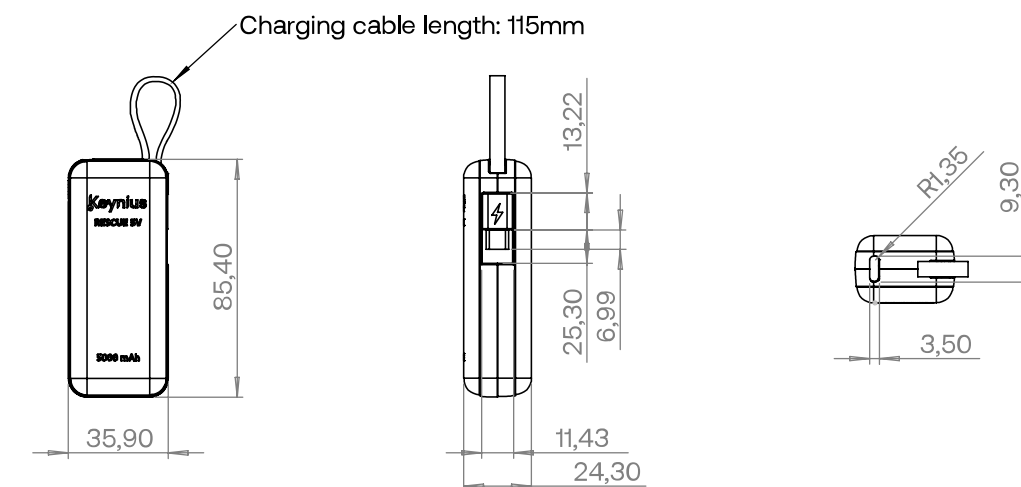



Cylinder Lock

11999032 CYLINDER LOCK
11999032MK CYLINDER LOCK 30MM MASTER KEY

- Easy to mount
- Master key available
- Available in various latch offsets
- Quartz cylinder lock

Technical Specifications


GENERAL

Material housing Zinc Alloy, brass, and steel

CERTIFICATION

Protection type IP30

Technical Drawing

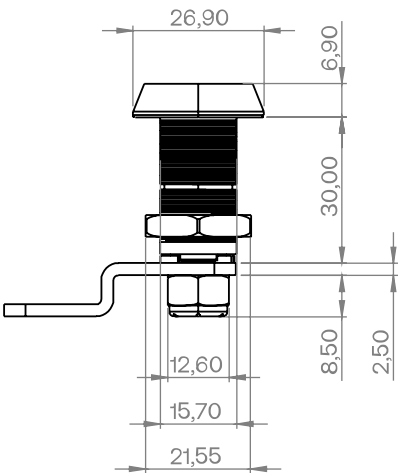

Latches


Technical Specifications

Material housing Stainless steel


Offset Latch 0mm




11604300 OFFSET LATCH 0MM

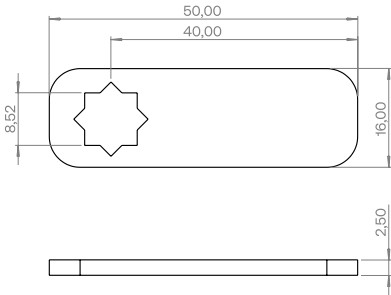


Offset Latch 3mm (standard)

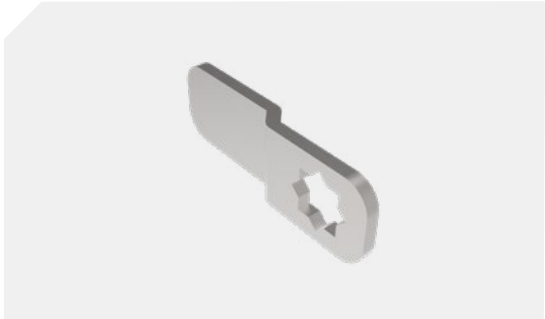


11604301 OFFSET LATCH 3MM

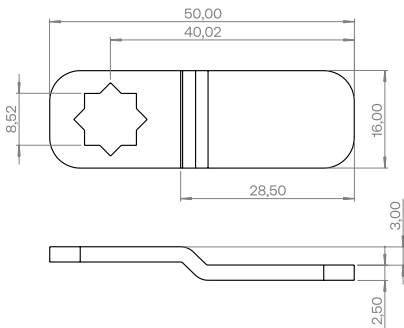

Offset Latch 6mm

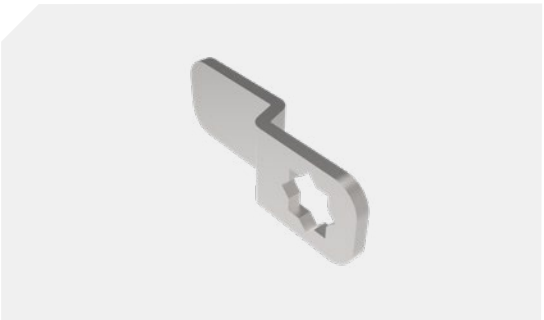


11604302 OFFSET LATCH 6MM

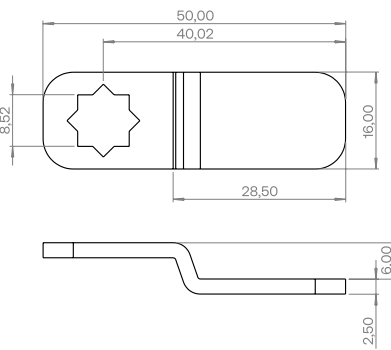

Offset Latch 9mm



11604303 OFFSET LATCH 9MM

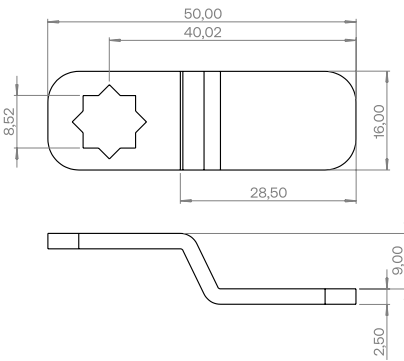



Contact us today

HEAD OFFICE. Parabool 28. 3364 DH Sledrecht (NL) . +31 (0)85 489 13 35

KEYNIUS UK. KEYNIUS USA. KEYNIUS HK. KEYNIUS IN. KEYNIUS EU. KEYNIUS NL. KEYNIUS UAE.

keynius.eu